

76 Wave Encore, Encore S Dispenser Image Refresh Installation Guide




This Phillips image refresh is for an Encore or Encore S pump dispenser. Please verify the specifications of your site before beginning. Contact **LSI Customer Service at 1-800-231-0129** for installation support.

Read through all of the instructions prior to beginning installation, and verify (using the packing list) that all parts have been received and are in good condition.

**DO NOT
REMOVE
EXISTING
RISERS FROM
DISPENSER!**

Parts (Crest/Wave)




Qty. 4 of riser cover cap for universal riser or tuxedo riser



Door, 76 Wave, Qty. 2

#8 X 3/4" K-lathe Tek screws
Qty. 20 silver and 20 orange




Riser cover, 76 Wave, Qty. 2




Riser pump extension bracket, silver/orange, Qty. 4

10-32 X 3/4" pan head machine screws (silver) Qty. 10




Remove/Install Doors, 2 Plcs

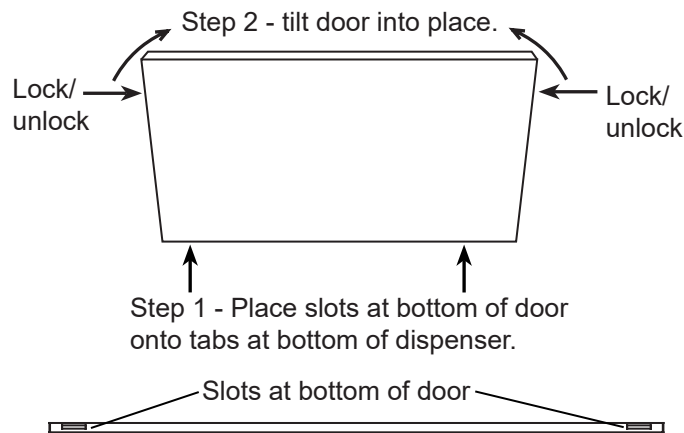


Install Extension Brackets




Install Top and Bottom Riser Cover Caps

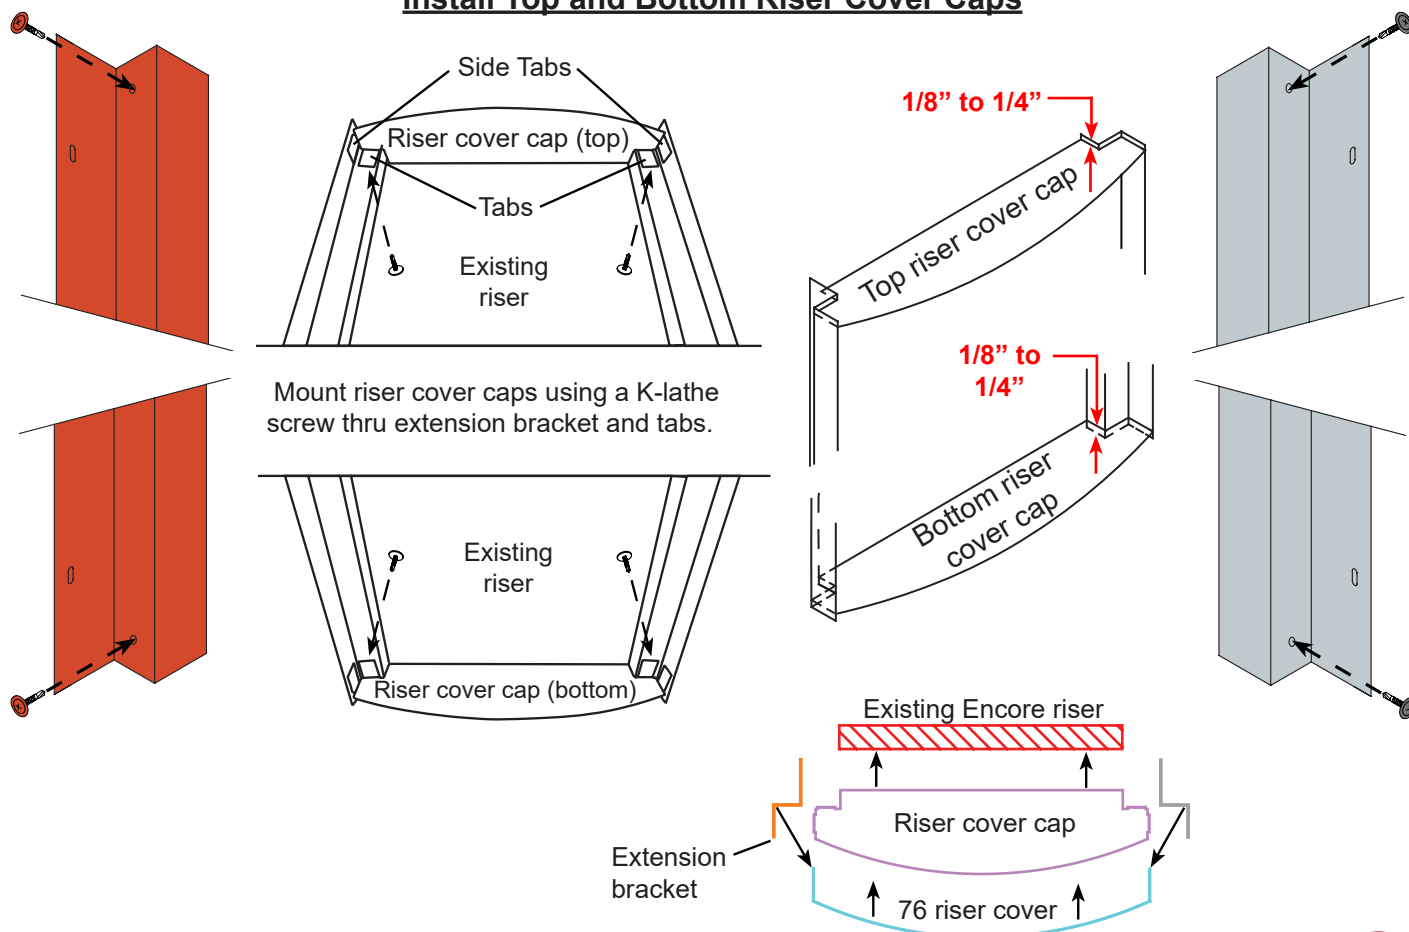

Install Top and Bottom Riser Cover Caps

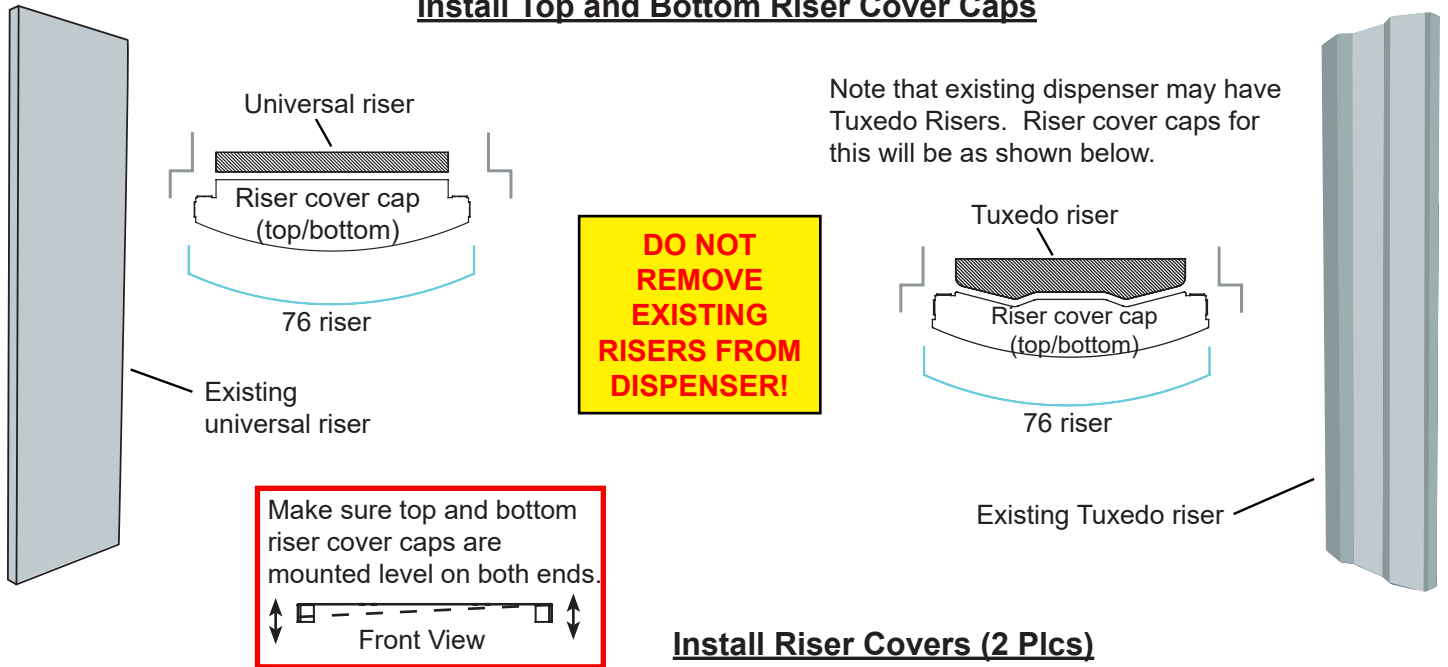


Install Riser Covers (2 Plcs)

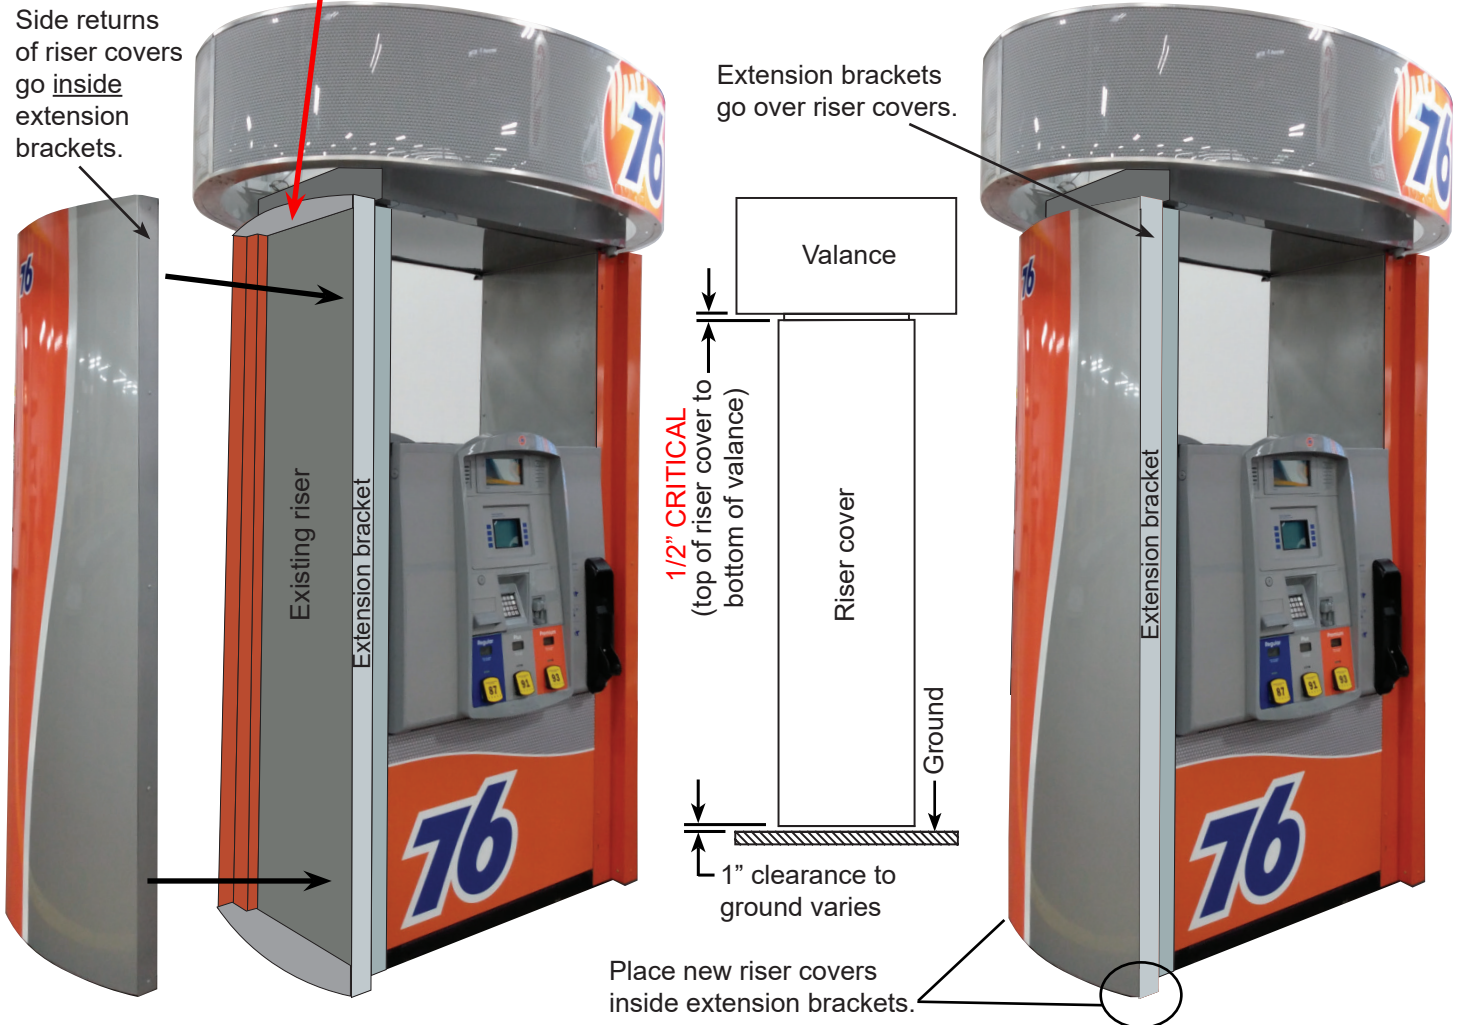

Place cover between extension brackets (extension brackets overlap sides of riser cover). Attach by driving K-lathe screws (painted to match extension brackets) through extension brackets into sides of riser cover. Top and bottom K-lathe screws pass through side tabs of top and bottom riser cover caps. Install two riser covers per dispenser.



76 Wave Dispenser Riser Cover Decal Application Instructions

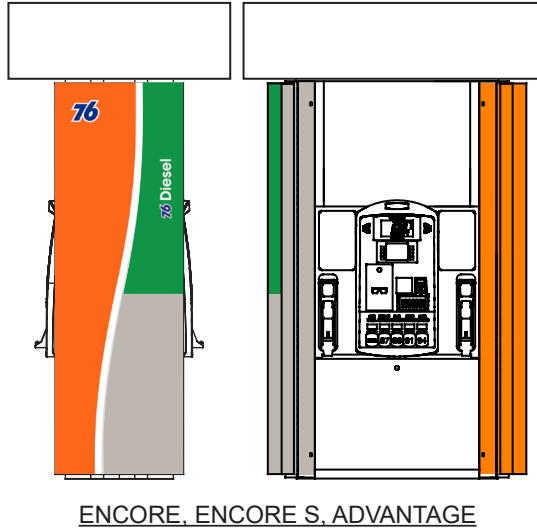


ENCORE, ENCORE S, ADVANTAGE




DECAL RISER COVER
44.00X17.04 66RF,
P76 WAVE DSL,
PN 767665,
ENCORE,
ENCORE S,
ADVANTAGE



DECAL RISER COVER
44.00X17.04 66RF,
P76 WAVE RENEW
DSL, PN 767664,
ENCORE,
ENCORE S,
ADVANTAGE

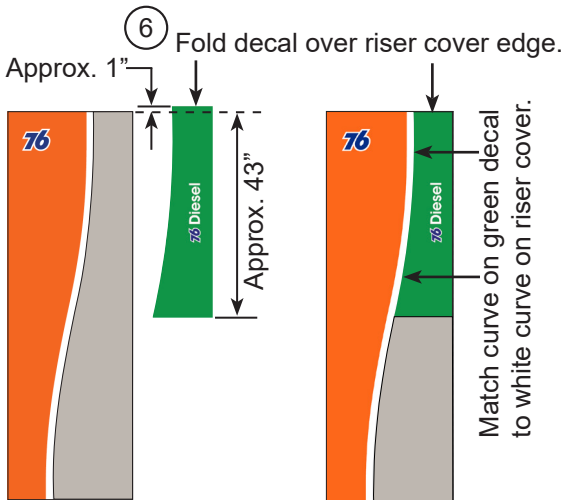

Position green decal on riser cover, matching curve on decal to curve on riser cover.

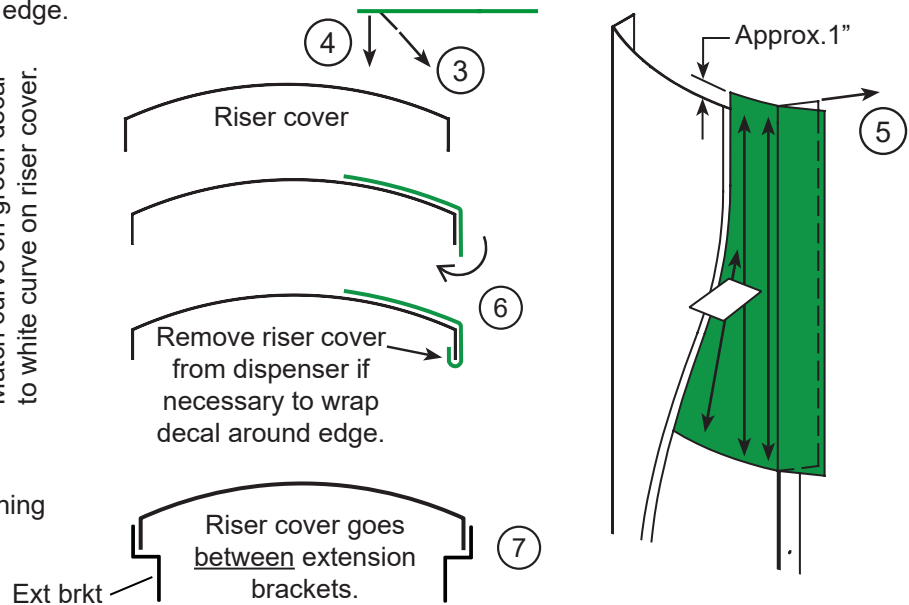

1. Clean any heavy grease with very small amount of degreaser or surface cleaner like Formula 409 applied to cloth. Do not use glass cleaner. Do not let cleaner get at edges of decals.
2. Clean riser cover surface with small amount of 50% solution of isopropyl alcohol (IPA) and water applied to cloth, wipe off with low lint cloth, let dry thoroughly.
3. Peel about 1" of backing from decal. Leave pre-mask on front for handling.
4. Position decal on riser cover and press edge onto riser cover surface.
5. Peel more of backing away and use stiff squeegee, hand pressure or cloth to apply decal to surface. Use back and forth motion as shown. Push bubbles out to edges. Can pop bubbles with pin to help release trapped air.
6. Wrap edge of decal around top edge and back edge of riser cover.
7. Place riser cover between extension brackets (extension brackets must be outside riser cover).

9/20/2021 - Date created.

11/10/2021 - Changed Torx screws to K-lathe in parts list on sheet 1. Added 6-32 x 1/4" pan head screws to parts list. Added statements to mount riser caps level and make sure riser covers are inside extension brackets.

3/27/2023 - Removed Shield image parts from guide. Changed gap at top of new riser cover to 1/2" below valance. Shortened guide format and eliminated pages. Changed 6-32 x 1/4" pan head screws on parts list to 10-32 x 3/4" to match JDE BOM.

3/28/2023 - Minor update to dispenser image on p. 1.

4/3/2023 - Changed title on p. 1 to "76 Wave Encore...", and changed term "riser" to "riser cover" throughout document.

10/16/2026 - Added diesel riser decal page.

